

PARTS LIST


ITEM NO	COMPONENT	PART NO.	DESCRIPTION	MANUFACTURER	QTY	REMARKS
①	FOUNTAIN	—	60"H x 34"W x 18"D 240lbs. LION FOUNTAIN — GFRC	TREVI	1	COLOR OPTIONAL
②		—	6-1/2"H x 7"W x 10"L GFRC	TREVI	1	COLOR OPTIONAL
③	TUBING	—	3/8" I.D. x 12" LRG COPPER PIPE PLAIN END BENDED @ ONE END	—	1	PRE-INSTALLED
④		—	3/8" I.D. x 1'0" LG TUBING — CLEAR VINYL PIPE PLAIN END	—	1	PRE-INSTALLED
⑤		—	1/2" DIA CPVC STRAIGHT 90° ELBOW	—	1	PRE-INSTALLED
⑥		—	1/2" DIA CPVC COUPLER	—	1	PRE-INSTALLED
⑦		—	1-1/4" DIA PIPE CLASS 200 CPVC SLEEVE	—	1	PRE-INSTALLED
⑧		—	3-1/2" LG COPPER MOUTH CHANNEL	TREVI	1	PRE-INSTALLED
⑨	PARTS BAG	A112	1/2" I.D. x 6" LG TUBING — CLEAR VINYL PLAIN END	—	1	ON SITE INSTALLATION
⑩		A112	PLUG	—	1	ON SITE INSTALLATION
⑪		A112	SHIM PLASTIC	EZ — SHIM	2	ON SITE INSTALLATION
⑫	PUMP	—	1"x1/2" DIA ADAPTER THREADED	JEAN TECH INC.	1	ON SITE INSTALLATION
⑬		—	WT300, 190 GPH SUBMERSIBLE PUMP	JEAN TECH INC.	1	ON SITE INSTALLATION

NOTE:

Electrical supply must conform with local & national regulation/codes.
If in doubt consult an electrician.

To ease connections hot water may be used to soften PVC tubing.
Pump and plumbing details may vary.

Precautions should be taken to prevent damage from water freezing in reservoir.

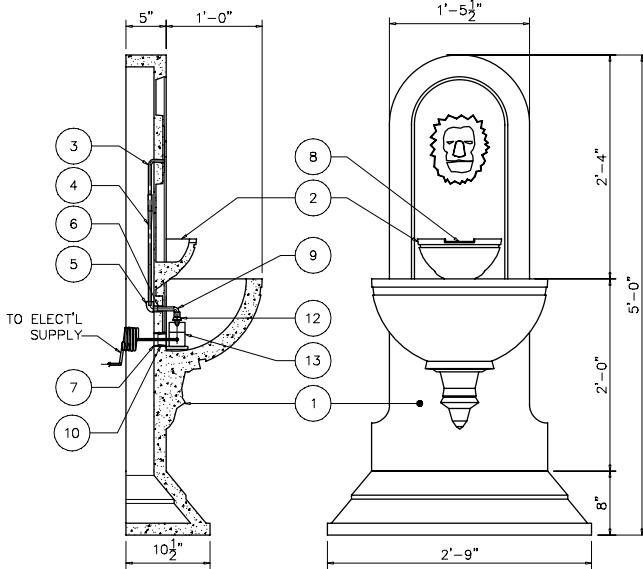

2 SECTION

SCALE: 1/2"=1'

1 ELEVATION

SCALE: 1/2"=1'

